


| | |
|--|--|
| Type: | S7-C 2-pole, 1 level integrated clip and marking label suitable for clips C80 series time relays coil bridge bus bar to connect in A2 plug-in slot for overvoltage suppressing units |
| Rated current | 10 A |
| Specifications | |
| Rated load | 10 A / 250 V |
| Insulation | Test voltage V_{rms} / 1 min |
| – All terminal/DIN rail | 2.5 kV |
| – Terminal/terminal | 2.5 kV |
| Cross section of connecting wire | |
| – Single wire | 4 mm ² , 2 x 1,5 mm ² |
| – Multi wire | 2,5 mm ² / AWG 16, 2 x 1 mm ² / AWG 18 |
| Max. screw torque | 1,2 Nm |
| Screw dimensions | M3, Pozi, slot |
| Integrated retaining clip/plastic | for relays C7 |
| Labelling space | detachable |
| Connection label | 1 ... 8, DIN/EN |
| Mounting | DIN rail TS35 or mounting plate |
| Ambient temperature operation/storage | -40 (no ice) ... 60 °C / -40 ... 80 °C |
| Associated plug-in 8-pin QRC relays | C7-A2x, C7-T, C7-G, C7-X, C7-W, C7-H |
| Associated C80 time relays | C83, C85, 84 |




Connection diagram

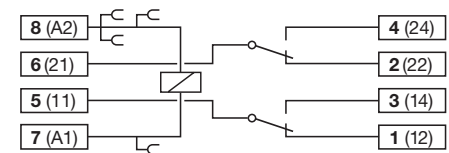

| | |
|---------------------|-------------|
| Accessories | |
| Coil bridge bus bar | S7-B |

Please note:
This socket replaces former socket S7-M
frilly compatible

Dimensions [mm]

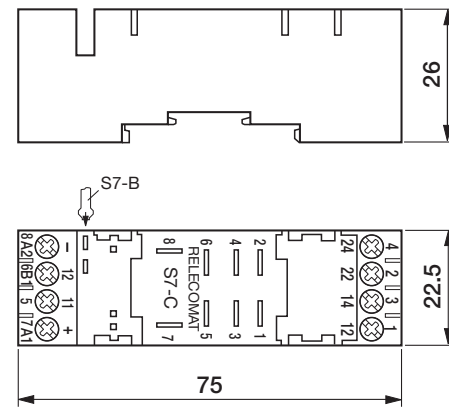

Technical approvals, conformities

